



REFURBISHED
RESPIRATORY
EQUIPMENT



O2Go

The O2Go and AirGo (All-In-One) valves are the most compact and lightweight units on the market today. All units are built out of lightweight anodized aluminum to ISO-9001:2015, CGA & FDA guidelines and or regulations. These guidelines ensure the units perform at the highest standard possible with the most reliability. All units are 100% tested before they leave the factory.

O2Go Popular Models Available*

| Part Number | MRI Compatible? | DISS | FLOW | Handle |
|-------------|-----------------|------|--------|--------|
| CS201S14HO | No | Yes | 4 LPM | Halo |
| CS201S18HO | No | Yes | 8 LPM | Halo |
| CS201S115HO | No | Yes | 15 LPM | Halo |
| CS201S125HO | No | Yes | 25 LPM | Halo |
| CS201M14HO | Yes | Yes | 4 LPM | Halo |
| CS201M18HO | Yes | Yes | 8 LPM | Halo |
| CS201M115HO | Yes | Yes | 15 LPM | Halo |
| CS201M125HO | Yes | Yes | 25 LPM | Halo |

All Models Feature a .750-16UNF2A Inlet, and a CGA 540 Fill Port

*Other options available. See our Part Number Guide below.



Optional
Vertical
Handle
Available



AirGo

AirGo Popular Models Available*

| Part Number | MRI Compatible? | DISS | FLOW | Handle |
|-------------|-----------------|------|--------|--------|
| CS201S14HA | No | Yes | 4 LPM | Halo |
| CS201S18HA | No | Yes | 8 LPM | Halo |
| CS201S115HA | No | Yes | 15 LPM | Halo |
| CS201S125HA | No | Yes | 25 LPM | Halo |
| CS201M14HA | Yes | Yes | 4 LPM | Halo |
| CS201M18HA | Yes | Yes | 8 LPM | Halo |
| CS201M115HA | Yes | Yes | 15 LPM | Halo |
| CS201M125HA | Yes | Yes | 25 LPM | Halo |

All Models Feature a .750-16UNF2A Inlet, and a CGA 540 Fill Port

*Other options available. See our Part Number Guide below.

PART NUMBER GUIDE

CS201S125HO

STYLE

S=Standard
M=MRI Compatible

PTO 50 PSI (DISS)

N=No DISS
I=With DISS

FLOW

4-0-4 LPM
8-0-8 LPM
15-0-15 LPM
25-0-25 LPM

HANDLE

H=Halo
V=Vertical

GAS

O=Oxygen
A=Air

MRI: Add \$25.00

No DISS: Deduct \$5.00

Customize your O2Go or AirGo
using our part number guide

Regulator Features



REFURBISHED
RESPIRATORY
EQUIPMENT

Easy to Read "Precise" Flows

Quick adjustment with 11 different flow rate settings.

Range: 4 LPM to High Volume 25 LPM

Built-in Rupture Disc

Helps promote Added safety for peace of mind and use.

50 PSI DISS Port (Optional)

Can be used to power a Portable Pressure Type Ventilator.

CGA540 FILL/VACUUM Port

Vacuum and Fill through one port.



O2Go

Compact Composite Body

Helps reduce weight and compliments Portability which is paramount in Hospital and Field use.

Measures 4.75" high from Cylinder Neck. One of the lightest units on the market at just 1.9 pounds.

MR Conditional Unit Rated up to 3.0 - Tesla (3T) (Optional)

Passed ASTM-G175 Ignition Sensitivity Testing.



AirGo

Phone: 866-446-8765 Fax: 317-241-5533

www.cryois.com


1936 S. Lynhurst Dr Suite M Indianapolis, IN 46241

Regulator Features



REFURBISHED
RESPIRATORY
EQUIPMENT

*O2Go Model
Shown*

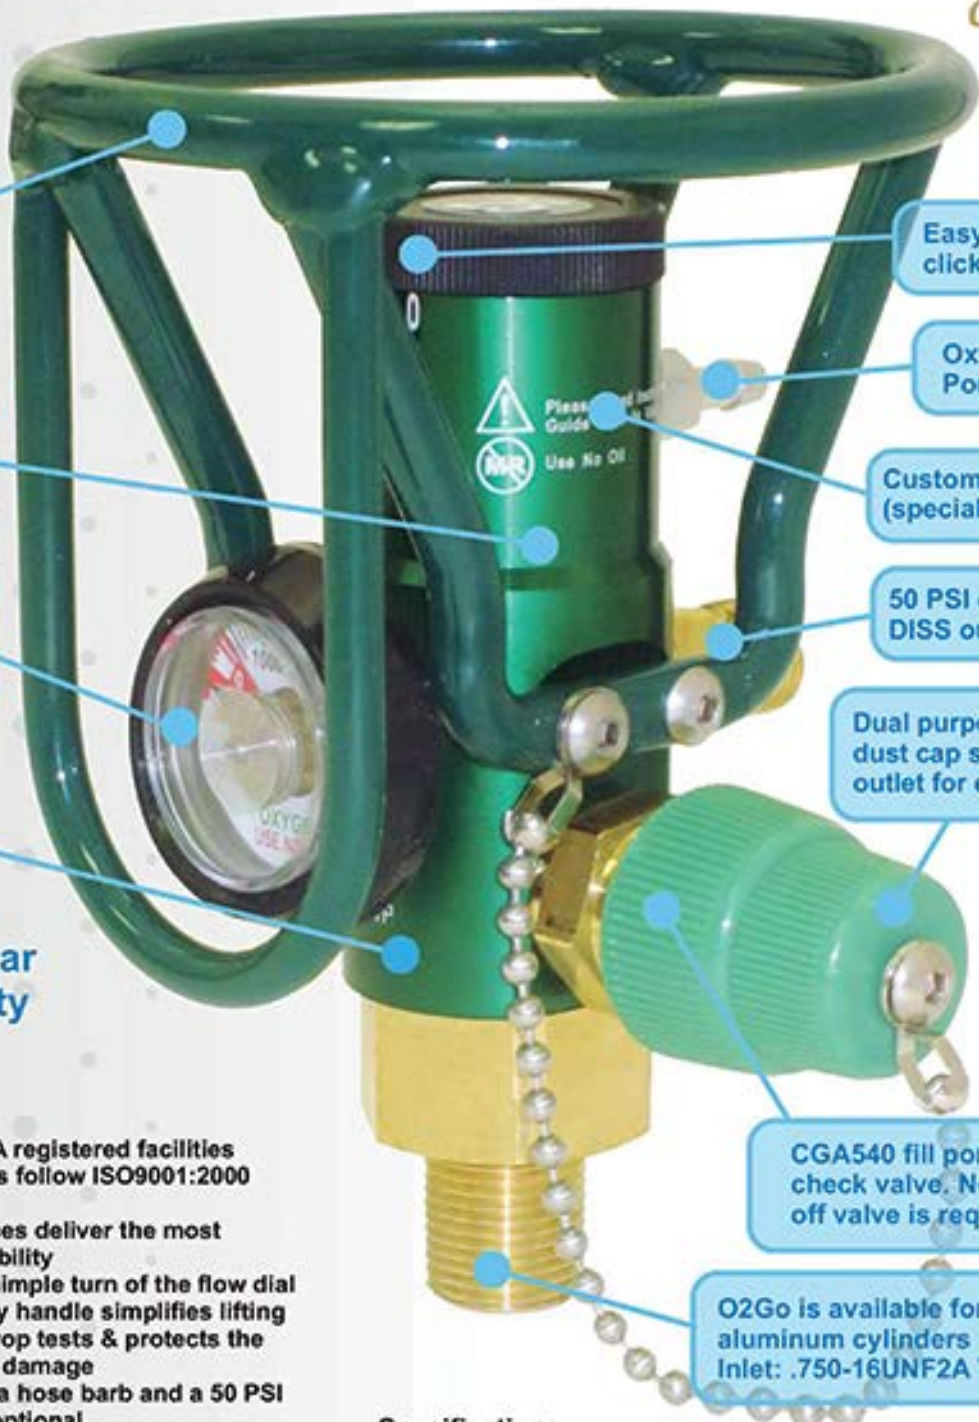

Patented Powder Coated Steel Halo Handle. Easy to carry & offers maximum strength & protection

Patented Solid One Piece Anodized Light Weight Aluminum Design

Easy to read cylinder contents gauge with rubber boot and enclosed guard

O2Go Passed ASTM-G175 ignition tests.

Easy to Read click liter flow dial

Oxygen Delivery Port

Custom logo available (special order)

50 PSI constant flow DISS outlet (Optional)

Dual purpose protective dust cap screws on DISS outlet for easy purging

PLUS! TWO Year Limited Liability Warranty

CGA540 fill port with check valve. No shut off valve is required

O2Go is available for aluminum cylinders
Inlet: .750-16UNF2A Thread

- O2Go is manufactured in FDA registered facilities
- All processes and procedures follow ISO9001:2000 standards
- Precision machining tolerances deliver the most accurate performance & reliability
- User can initiate flow with a simple turn of the flow dial
- Ergonomically designed carry handle simplifies lifting & cylinder handling. Meets drop tests & protects the regulator body & gauge from damage
- All models are supplied with a hose barb and a 50 PSI constant flow DISS outlet is optional.
- The check valve fill port is pressure operated with standard soft tip CGA540 hand tight filling adapter.
- Filling, evacuation & filling is accomplished using a single connection.
- All units are serial numbered.
- Private label options available.

Specifications
 Max Working Pressure: 2200 PSI
 Standard Operating Pressure: 2015 PSI
 Standard Safety Device: 3360 PSI, CG4, 165F fusible metal
 Dimensions: 6"H x 4"W x 3.75"D
 Operating Temperature: -13 to 140F
 Aluminum Model Weight: 1.8 lbs

STANDARD LITER FLOW AVAILABLE

| Liter Per Minute | Flow Dial Settings | Typical Application |
|------------------|---|---------------------|
| 25 LPM | 0 - 1/2 - 1 - 2 - 3 - 4 - 6 - 8 - 10 - 15 - 20 - 25 | EMS, Hospital |
| 15 LPM | 0 - 1/2 - 1 - 1 1/2 - 2 - 3 - 4 - 5 - 6 - 8 - 10 - 15 | Hospital, Homecare |
| 8 LPM | 0 - 1/2 - 1 - 1 1/2 - 2 - 2 1/2 - 3 - 4 - 5 - 6 - 7 - 8 | Homecare |
| 4 LPM | 0 - 1/32 - 1/16 - 1/8 - 1/4 - 1/2 - 3/4 - 1 - 1.5 - 2 - 3 - 4 | Pediatric |


Cylinder Tanks



REFURBISHED
RESPIRATORY
EQUIPMENT

The O2Go & AirGo valves are designed to be installed on aluminum cylinders. Cryogenic Solutions can offer units installed on the cylinder of your choice at a very competitive price. If you would prefer, you can send your cylinders in to us and have them refurbished to a like new condition and we can install the units on your tanks!

Please contact us today
for more information.

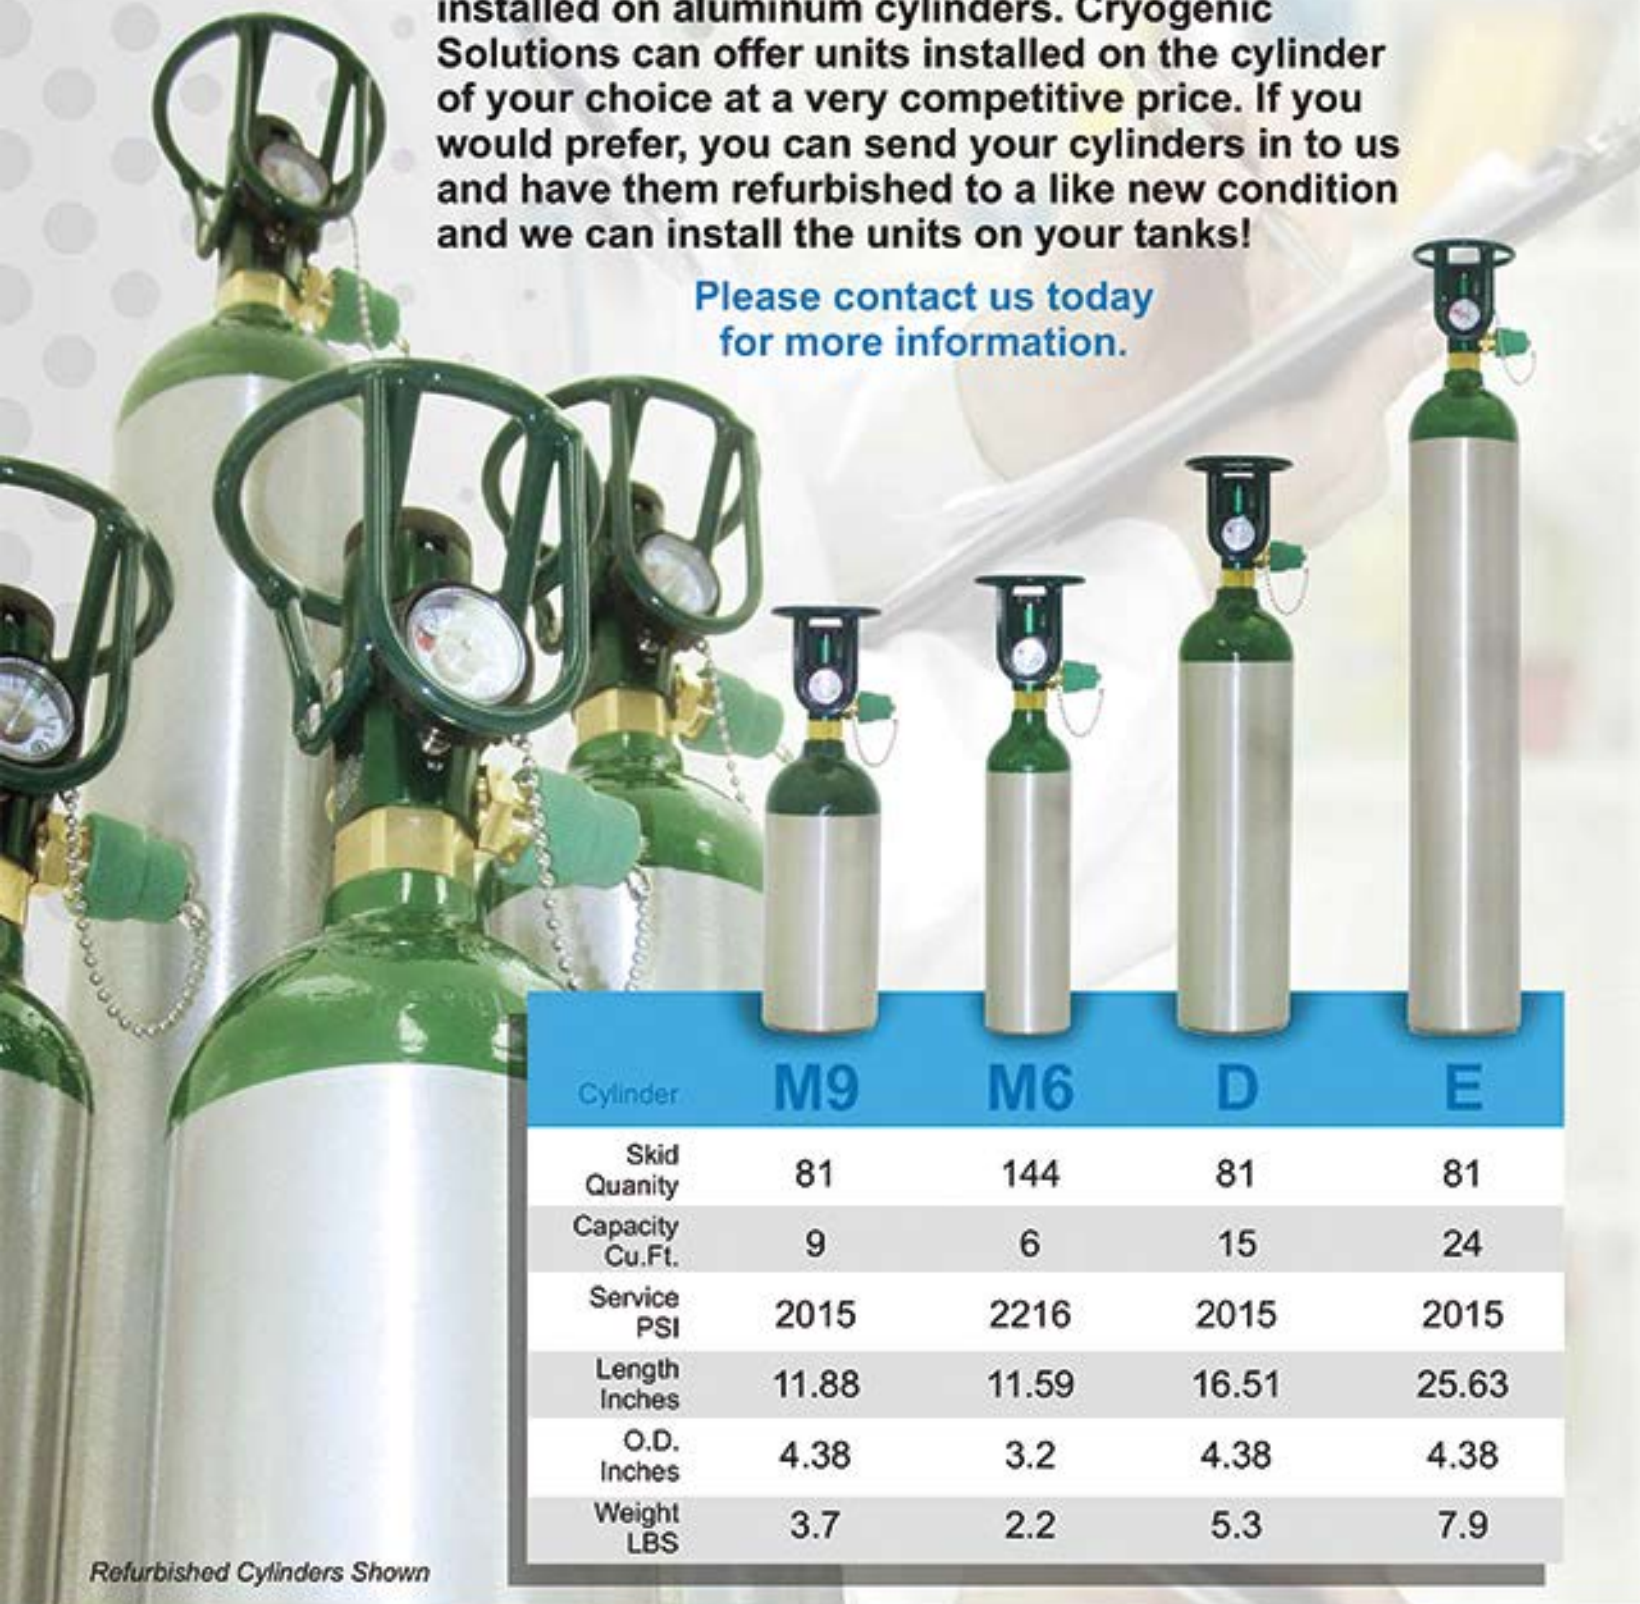

| Cylinder | M9 | M6 | D | E |
|-----------------|-------|-------|-------|-------|
| Skid Quantity | 81 | 144 | 81 | 81 |
| Capacity Cu.Ft. | 9 | 6 | 15 | 24 |
| Service PSI | 2015 | 2216 | 2015 | 2015 |
| Length Inches | 11.88 | 11.59 | 16.51 | 25.63 |
| O.D. Inches | 4.38 | 3.2 | 4.38 | 4.38 |
| Weight LBS | 3.7 | 2.2 | 5.3 | 7.9 |

Refurbished Cylinders Shown



REFURBISHED
RESPIRATORY
EQUIPMENT

Phone: 866-446-8765 Fax: 317-241-5533

www.cryois.com

1936 S. Lynhurst Dr Suite M Indianapolis, IN 46241